


Converger Inliner - Setting new standards of performance

Smart, Fast & Versatile, the next generation
Converger Inliner

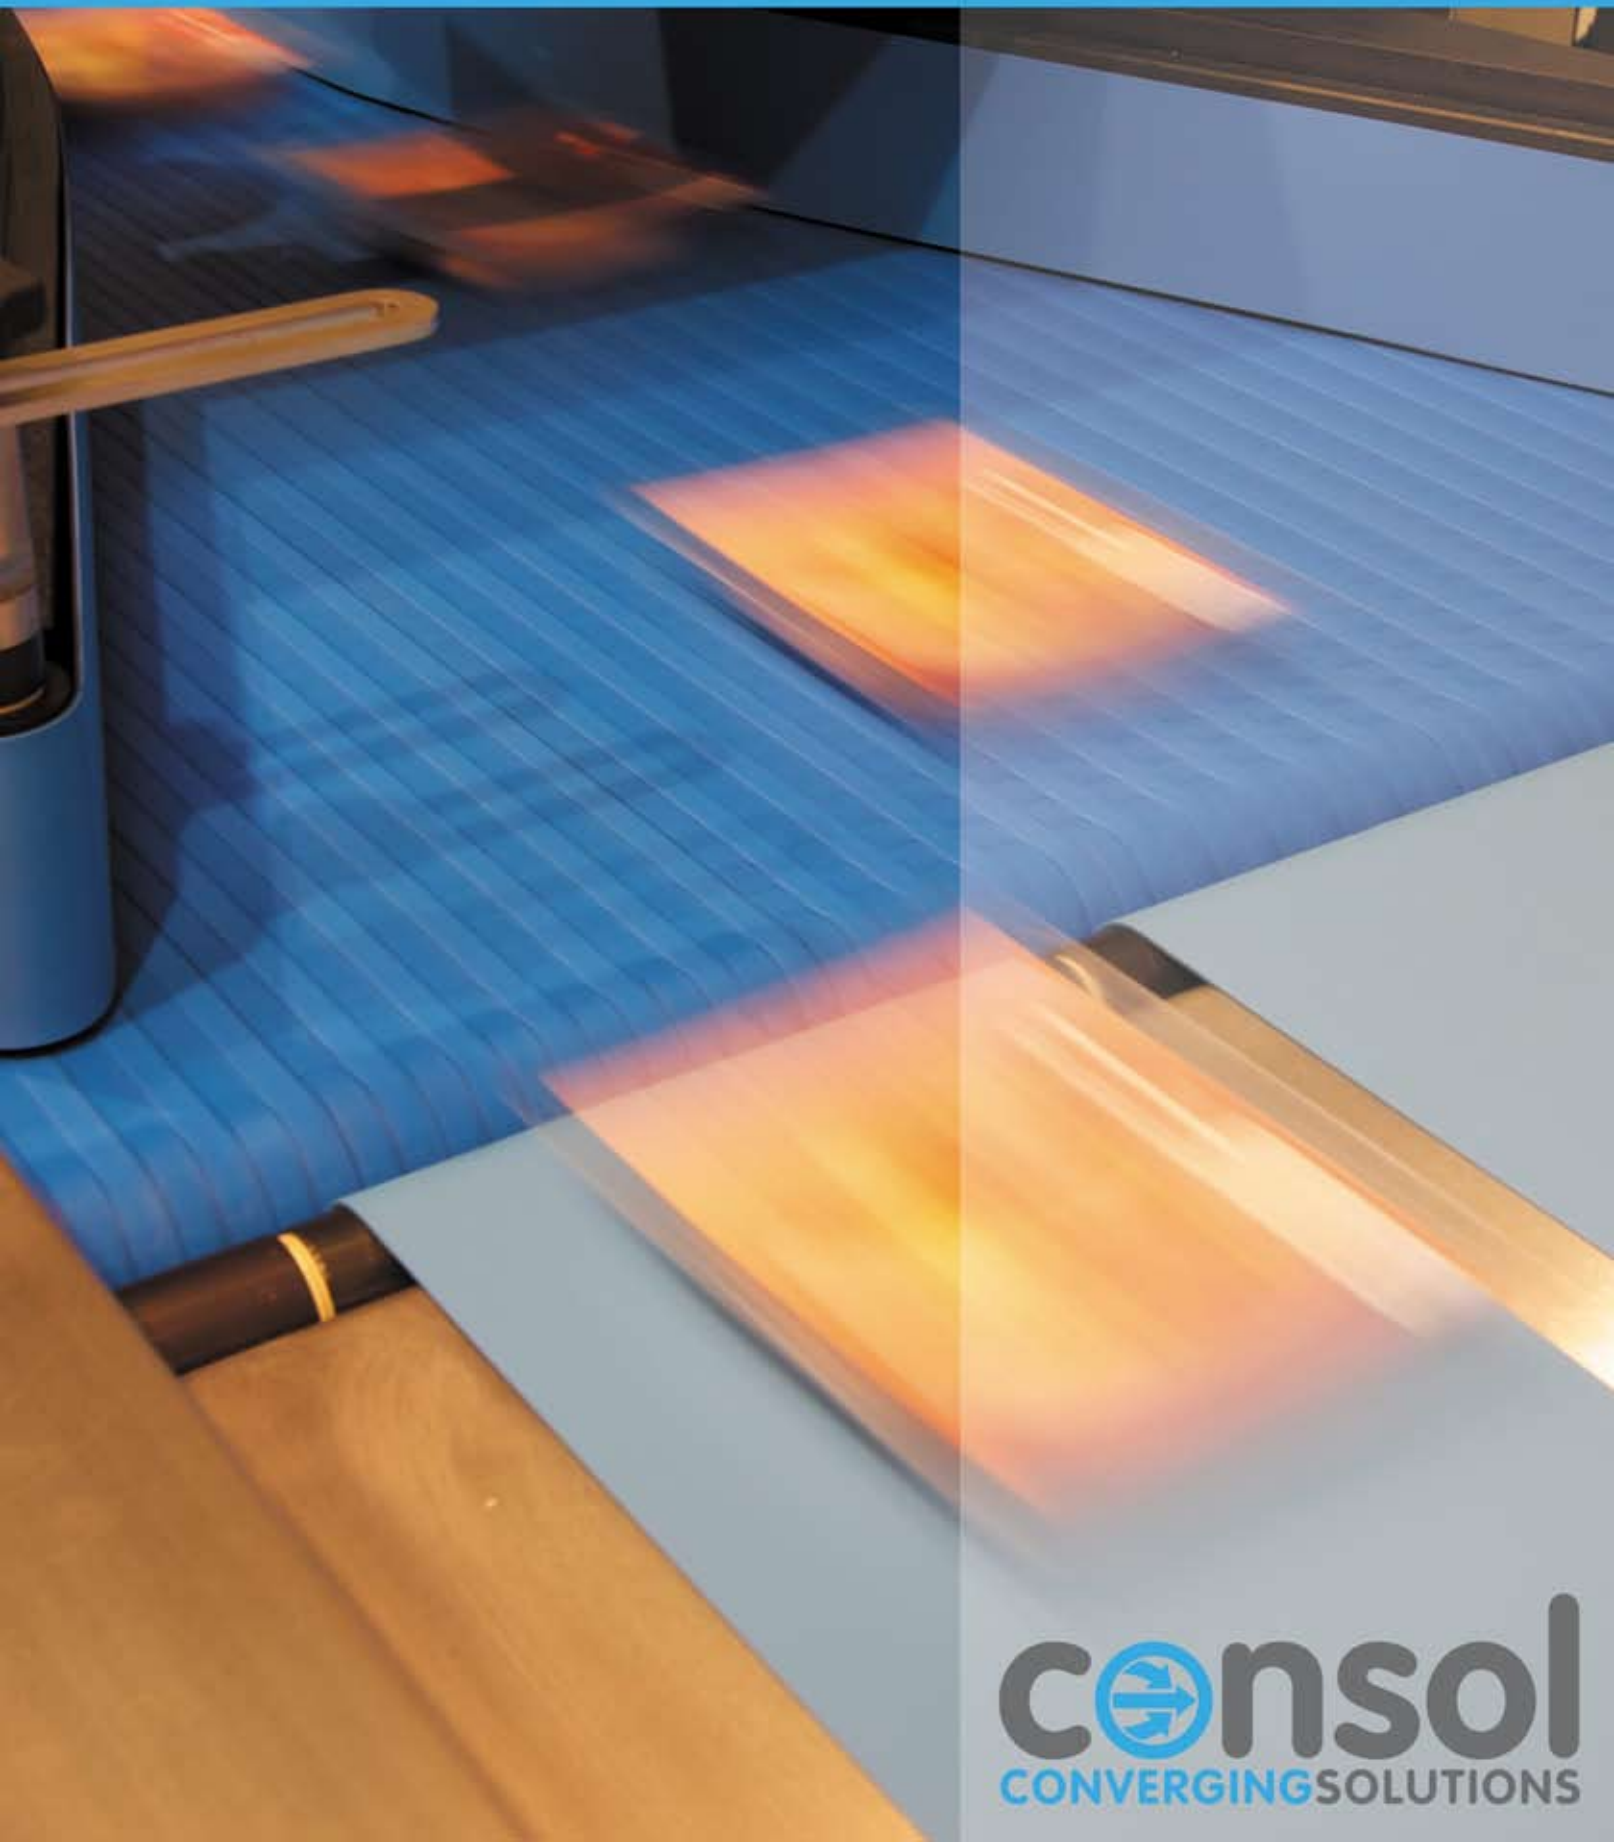

consol
CONVERGINGSOLUTIONS


Versatile by design Converger InLiner

Setting new standards of performance
and versatility



All Converger InLiners Feature:

- Command control module conveniently situated for ease of setup
- Independent operation from the Thermoformer allowing maximum current & future flexibility on your lines and the type of equipment it interfaces to.
- Wet and greasy applications are catered for
- Up to 8 tracks on a standard format machine
- High levels of performance offering converging speeds in excess of 200ppm
- Modular design allows future product additions to be handled by the system
- Multi Format Machines
- Simple set up and intuitive user interface
- Rapid Product changeovers for multi format applications
- Full line control systems for full line integration
- Automatic product spacing to ensure the maximum pitch at all times
- Automatic product jam detection interfacing with the line control system
- High levels of hygiene and ease of cleaning
- Rapid change infeed conveyor ensuring a positive transfer of packs from the cutting knives, adjustable to suit a wide range of draw depths.

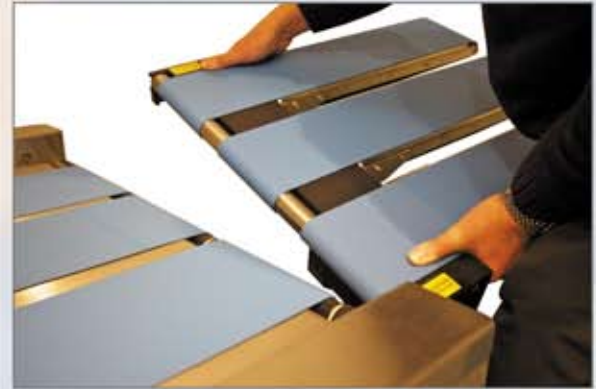

Powered Converging Rails – Parabolic:

- Powered adjustable ends ensuring packs arrive inline for labelling applications, complete with automatic belt tensioning
- Auto sensing in the event of product build back
- Parabolic shaping ensures no "pack lag" when handling packs at speed
- Prevents packs turning while converging/inlining
- Fully adjustable to suit a wide range of packs
- Future proof design




Versatility:

- We have over 10 years experience manufacturing Converging equipment
- Standard and special applications can be catered for
- Suitable for interfacing to all types of Thermoformers
- Twin output options for high speed lines
- Synchronising options for handling un-synchronised pack feeds

Services Required:

| | | |
|---|--------------------------------------|---|
| Power Supply: 230VAC 50/60 Hz | Power Consumption: 16 Amps | Air Supply: 4 Bar clean dry air |
| Air consumption: 1 litre per minute | Height: 850mm +/- 50mm | Protection: IP65 |

Apx. 1,815mm after Thermoformer

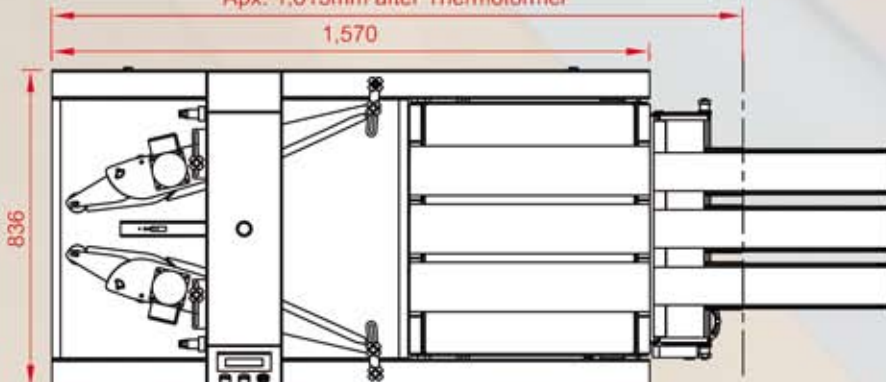

consol
CONVERGINGSOLUTIONS

Converging Solutions Ltd, Unit 13 Waterloo Park
Bidford on Avon, Warwickshire B50 4JG

TEL: +44 (0)1789 491144
FAX: +44 (0)1789 491155

sales@convergingsolutions.co.uk
www.convergingsolutions.co.uk