

CW³ 1500L Automatic Checkweigher

www.loma.com

Versatile, proven LightWeight checkweighing systems for the food and packaging industries



- Versatile Weighs a wide range of flexible and rigid packs up to 1.5kg
- Accurate Excellent accuracy, especially with flexible packaging
- Fast Belt speeds up to 120m/min
- Reliable Heavy duty conveyor components, high quality electronics
- Accredited OIML R51and EC TAC (MID) approved
- Easy to use Full colour graphical touch screen
- Environment Wide operating temperature range 0-40°C



CW³ 1500L Automatic Checkweigher

20

Finish: 304 stainless steel with brushed finish

Available Line Heights: 700mm - 1,200mm

Available System Lengths: 1,100mm - 3,100mm

Maximum Weight: 1,500g

Maximum Product Width: 300mm

Maximum Product Length: 425mm

Typical Accuracy, Un: 0.6g

Maximum Speed: 120m/min

Capacity: 400ppm
Supply Voltages: 110 or 230V/1ph/N+E 50 or 60Hz

Air Supply: 5 to 8 bar

Typical Reject Options: Air Blast, Pusher, Diverter

Environment: IP65

Belt type: Food quality flat belt - quick release (no tools required)

Standard inclusions: Adjustable feet, Reject bin, USB socket, Multi speed, Pack pitch monitor,

Stainless steel covers

Options: Servo feedback signal - for filler control, Serial Link, LomaEnet,

LED Indicator stack, Makrolon covers, 316 stainless steel



Stainless steel construction

Application specific filtering

Automatic mean weight correction

Sample packs function


Multi-product memory (500)

Brushless motors

High capacity loadcell

True multi-speed

R51 Approved to X(1) e = 1g

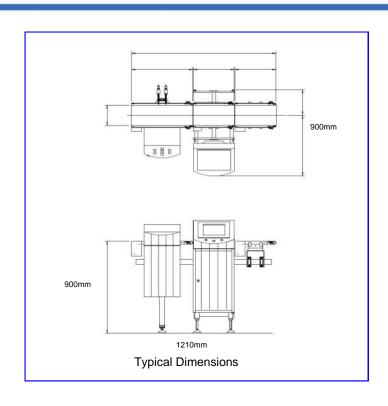



Inspection Systems Pty. Ltd.

Melbourne - Sydney - Brisbane - Perth - New Zealand

Freecall: 1800 354 302

E-mail: info@inspectionsystems.com.au Web: www.inspectionsystems.com.au